


Safety Analog Input Module HART Ex i Inputs, 8/6 Channels Series 9462



www.stahl.de

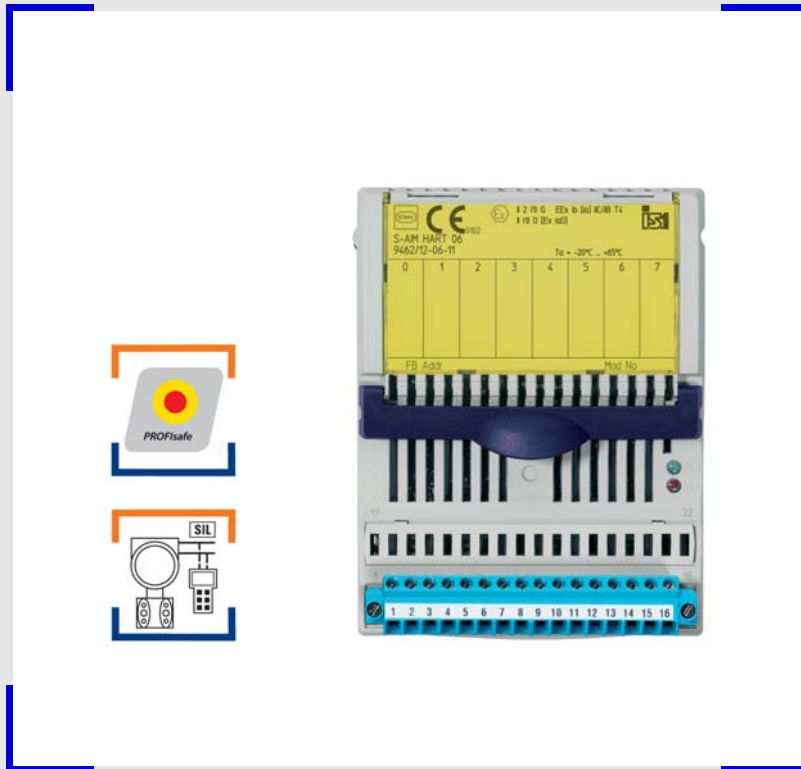

- > For all applications up to SIL 2 via PROFIsafe protocol (V1 or V2)
- > For SIL type 2-wire HART transmitters
- > 6 or 8 channels
- > Intrinsically safe inputs Ex ia IIC
- > Galvanic separation between inputs and system
- > Open-circuit and short-circuit monitoring for each field circuit
- > Status LEDs for RUN and ERROR, display for text messages



07425E00

A4

The Safety Analog Input Module HART is used for fail-safe operation of intrinsically safe 2-wire HART transmitters. It can be used in circuits with a functional safety (EN/IEC 61508) of up to SIL 2. The module communicates with the automation system as PROFIsafe slave and can be combined with I/O modules that are not relevant for safety.

In addition, the integrated HART multiplexer allows bidirectional HART communication between HART field devices and the automation and engineering system.

Analog transmitters (non-HART) can also be operated.



	ATEX / IECEx						NEC 505						NEC 506						NEC 500								
	0	1	2	20	21	22	Class I						Class II						Class III								
Zone	0	1	2	20	21	22	Zone	0	1	2	20	21	22	Division	1	2	1	2	1	2	Division	1	2	1	2	1	2
Ex interface	x	x	x	x	x	x	Ex interface	x	x	x	x	x	x	Ex interface	x	x	x	x	x	x	Ex interface	x	x	x	x	x	x
Installation in		x	x		x	x	Installation in		x	x		x	x	Installation in	x	x	x	x	x	x	Installation in	x	x	x	x	x	x

WebCode 9462A

Safety Analog Input Module HART Ex i Inputs, 8/6 Channels

Series 9462



Selection Table

Version		Order number	Weight kg
Safety Analog Input Module HART	8 channels for SIL-type 2-wire HART transmitters*	9462/12-08-11	0.380
	6 channels for SIL-type 2-wire HART transmitters	9462/12-06-11	0.380
Note	Please order terminal separately - see Accessories		
	* for Safety-Master with > 13 byte user data		

Explosion Protection

Global (IECEX)	
Gas and dust	IECEX PTB 06.0001X Ex ib [ia Ga] IIC T4 Gb [Ex ia Da] IIIC
Europe (ATEX)	
Gas and dust	PTB 99 ATEX 2175 ⊕ II 2 (1) G Ex ib [ia Ga] IIC T4 Gb ⊕ II (1) D [Ex ia Da] IIIC
Certifications and certificates	
Certificates	ATEX, IECEX, Brazil (INMETRO), Kazakhstan (TR), Russia (TR), Serbia (SRPS), USA (FM), Belarus (TR)
Ship approval	ABS, ClassNK, DNVGL, LR, RINA

Safety data

Maximum values	
Max. voltage U_o	26.2
Max. current I_o	91
Max. power	$P_o = 589$ mW
Max. capacitance for IIC	$C_o = 97$ nF
Max. inductance for IIC	$L_o = 2.1$ mH
Further information	see certificate

Functional safety

	tested according to IEC 61508:2010			
Max. SIL	2			
Safe state	"Alarm Code" or "No communication"			
Safe Failure Fraction SFF	98 %			
PFD _{AVG} at $T_{[Proof]}$	$T_{[Proof]}$	1 year	3 years	5 years
	PFD _{AVG}	9.8×10^{-5}	1.8×10^{-4}	2.61×10^{-4}
Further information	see safety manual and test report			

Technical Data

Version	9462/12-08-11 (8 inputs)	9462/12-06-11 (6 inputs)
Electrical data		
Ex i inputs		
Number of channels	8 (for 2-wire transmitters with / without HART)	6 (for 2-wire transmitters with / without HART)
Signal		
Signal range	4 ... 20 mA + HART	4 ... 20 mA + HART
Minimum signal	2.4 mA	2.4 mA
Maximum signal	22.8 mA	22.8 mA
Supply voltage	≥ 16 V at 20 mA for 2-wire transmitters at 23 °C ≥ 15 V at 20 mA for 2-wire transmitters at 65 °C	≥ 16 V at 20 mA for 2-wire transmitters at 23 °C ≥ 15 V at 20 mA for 2-wire transmitters at 65 °C
Filter time constant	medium	medium
Resolution in the range 4 ... 20 mA	12.75 bit	12.75 bit
Maximum delay from the input to the internal bus, 0 ... 90 % of the signal span	120 ms	120 ms

Safety Analog Input Module HART Ex i Inputs, 8/6 Channels

Series 9462



Technical Data

Version	9462/12-08-11 (8 inputs)	9462/12-06-11 (6 inputs)
Electrical data		
Ex i inputs		
Maximum short-circuit current	35 mA	35 mA
Galvanic separation		
between power supply and system components	1500 V AC	1500 V AC
between two input / output modules	500 V AC	500 V AC
between inputs and system components	500 V AC	500 V AC
	The inputs and outputs of an I/O module have a common minus conductor	The inputs and outputs of an I/O module have a common minus conductor
Accuracy of measurement		
Note	All values in % of the signal span, at 23 °C / 73.4 °F	All values in % of the signal span, at 23 °C / 73.4 °F
Max. measurement deviation		
Functional	0.1 %	0.1 %
Safety-relevant	2 %	2 %
Ambient temperature influence	0.1 % / 10 K	0.1 % / 10 K
Settings		
Functional parameters	None	None
Safety parameters	<ul style="list-style-type: none"> • PROFI-safe slave address • CRC length 2, 3, 4 bytes 	<ul style="list-style-type: none"> • PROFI-safe slave address • CRC length 2, 3, 4 bytes
Value to fieldbus during open circuit, short circuit	Alarm code	Alarm code
Diagnostics		
Retrievable parameters	Manufacturer, type, version, serial number	Manufacturer, type, version, serial number
Module faults	<ul style="list-style-type: none"> • Internal primary bus faults • Internal redundant bus faults • No response • Module does not correspond to configuration • Hardware fault 	<ul style="list-style-type: none"> • Internal primary bus faults • Internal redundant bus faults • No response • Module does not correspond to configuration • Hardware fault
Signal errors for each channel		
Message	Alarm code	Alarm code
Open circuit	< 2.4 mA *)	< 2.4 mA *)
Short circuit	> 22.8 mA *)	> 22.8 mA *)
Measuring range	Over range / under range	Over range / under range
	*)Note: Connect a resistor of approx. 4,7 k Ω +/- 1 k Ω to unused inputs in order to avoid error messages.	*)Note: Connect a resistor of approx. 4,7 k Ω +/- 1 k Ω to unused inputs in order to avoid error messages.
Operator interface		
Operation	LED green "RUN"	LED green "RUN"
Fault	LED red "ERR"	LED red "ERR"
LCD display	Operating and status messages; 2 x 16 characters and 2 operating keys	Operating and status messages; 2 x 16 characters and 2 operating keys
Auxiliary power		
Maximum power consumption	6.6 W	6 W
Maximum power dissipation	3.7 W	3.6 W

A4

Safety Analog Input Module HART Ex i Inputs, 8/6 Channels

Series 9462



Technical Data

Version	9462/12-08-11 (8 inputs)	9462/12-06-11 (6 inputs)
Electrical data		
Electrical connection	Plug-in terminals 16-pole with catch, 2.5 mm ² , screw or spring type	
Ex i field signals		
Connection diagram		
	07423E00	
Ambient conditions		
Ambient temperature	-20 ... +65 °C	
Storage temperature	-40 ... +70 °C	
Maximum relative humidity	95 % (no condensation)	
Sinusoidal vibration (IEC EN 60068-2-6)	1 g in frequency range between 10 ... 500 Hz 2 g in frequency range 45 ... 100 Hz	
Semi-sinusoidal shock (IEC EN 60068-2-27)	15 g (3 shocks per axis and direction)	
Electromagnetic compatibility	Tested according to the following standards and regulations: EN 61326-1, EN 61000-4-1...6, NAMUR NE 21	
Mechanical data		
Module enclosure	Polyamide 6GF	
Fire resistance (UL 94)	V2	
Degree of protection (IEC 60529)		
Modules	IP30	
Connections	IP20	
Mounting / Installation		
Installation conditions		
Mounting type	on 35 mm DIN rail NS 35/15	
Mounting orientation	horizontal and vertical	
Engineering notes	<ul style="list-style-type: none"> • Safety modules and non-safety modules can be combined on a BusRail • Zone 1 modules (946./2) and Zone 2 modules (946./5) can be combined on a BusRail • A partition (162740) is required to separate intrinsically safe and non-intrinsically safe circuits (≥ 50 mm / 2 in) 	




Accessories and Spare Parts

Designation	Figure	Description	Art. no.
Plug-in terminal	 02079E00	2.5 mm ² with lock, 16-pole, screw connector, blue, for connecting the field signals to I/O modules, for intrinsically safe field circuits Labelling: 1 ... 16 Attention: An additional terminal is necessary for I/O module Series 9470 and 9480. Designation: 17 ... 32	162702
	 02077E00	2.5 mm ² with lock, 16-pole, spring clamp connection, blue, for connecting the field signals to I/O modules, for intrinsically safe field circuits, incl. test jacks Labelling: 1 ... 16 Attention: An additional terminal is necessary for I/O module Series 9470 and 9480. Designation: 17 ... 32	162695
Labelling strips	 05869E00	"FB Addr ... Mod No ..." for pluggable terminal, sheet with 26 strips	162788

Safety Analog Input Module HART Ex i Inputs, 8/6 Channels Series 9462



Accessories and Spare Parts

Designation	Figure	Description	Art. no.
Designation strips	 05871E00	For BusRail, for 1 BusRail with 16 I/O modules	162793
Warning sign	 05872E00	"Clean modules only with a damp cloth."	162796
Partition	 15198E00	For mounting between intrinsically safe and non-intrinsically safe connections of the I/O modules, in order to adhere to the required 50 mm distance	220101

A4

Dimensional Drawings (All Dimensions in mm / inches) - Subject to Alterations



We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.